

November 19, 2021

ADDENDUM No. 1

LUC-OREGON TRAIL PHASE 4 BIKEWAY PROJECT (PID 111544)

BIDS TO BE OPENED: Tuesday, November 30, 2021 at 10:00 AM

Plan holders of the City of Oregon's LUC-Oregon Trail Phase 4 Bikeway Project (PID 111544) are hereby notified of the following amendments to the Contract Documents. The following additions, alterations, deletions and/or clarifications shall be part of the bid specifications as much as if they were originally included in the Contract Documents. This Addendum No. 1 is hereby made a part of the Contract Documents.

ANSWERS TO SUBMITTED QUESTIONS

1. ***Bidder Question:*** Are there soil borings available for this project?


Engineer Response:

[Soils information](#) is available for viewing both on the [City of Oregon Bidding Information Web Page](#) and the [Newfax Corporation](#) web site.

2. ***Bidder Question:*** If required, is there additional embankment material available on site or in the proximity? Can we dig a borrow pit?

Engineer Response:

A borrow pit will not be necessary. There is an existing city-controlled stockpile of material on the north side of Pickle Road (3831 Pickle Road) that can be used by the contractor for fill material. (See additional TTL Report from a recent sample included with above noted soils information.) If used, contractor shall be responsible for striping and stockpiling existing 4 inches of topsoil from the top of the mound prior to excavating spoils from the stockpile. Following the completion of the excavation work from the existing stockpile mound, all disturbed areas of the mound shall be reshaped and regraded, topsoil replaced, and then prepared, seeded (ODOT Class 1 mix), fertilized and mulched according to ODOT 659. The cost of this work is to be included in the embankment item.

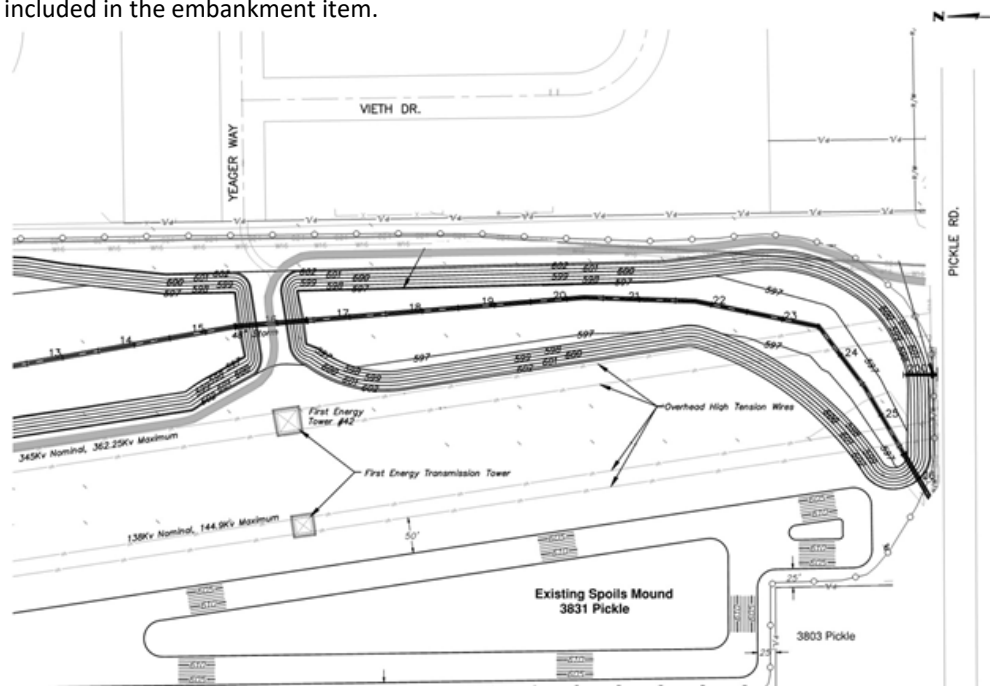

***** END OF ADDENDUM NO. 1 *****